

Reaction Bar Nutrunners

Clecomatic Clutch & Stall


Cleco®

45, 55 & 64 Series

Torque Range:
14 – 3850 Nm
10 – 2837 Ft. Lbs.

Bolt Size:
M6 – M42
5/16 – 1 3/4"

- Inline & Pistol Grip
- Reversible
- Lever, button and trigger start
- Swingbar (64 series)

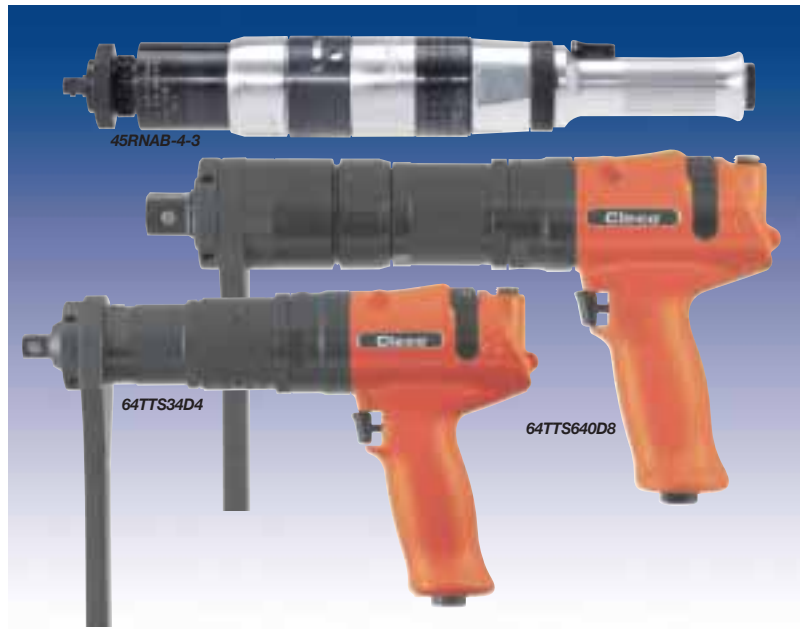

Model Number	Drive Size	Suitable for Bolt Size		Free Speed RPM	Torque Range		Length		Weight*	
		in.	mm		ft.-lbs.	Nm	in.	mm	lbs.	kg
Inline – Clecomatic – Lever Start – Twist Ring Reverse										
55RNAL-4-4	1/2	7/16	M8	560	34-20	46-27	16.1	410	6.5	3.0
55RNAL-3-4	1/2	1/2	M10	370	51-25	69-34	16.1	410	6.5	3.0
55RNAL-2-4	1/2	1/2	M12	270	67-30	91-46	16.1	410	6.5	3.0
Inline – Clecomatic – Button Start – Twist Ring Reverse										
45RNAB-6-3	3/8	5/16	M6	740	16-10	22-14	14.5	368	5.4	2.4
45RNAB-4-3	3/8	3/8	M8	560	22-14	30-19	14.5	368	5.4	2.4
45RNAB-3-3	3/8	7/16	M8	370	33-18	45-24	14.5	368	5.4	2.4
45RNAB-2-4	1/2	7/16	M10	270	46-23	62-31	14.5	368	5.4	2.4
Pistol - Stall Torque – Reversible – Swingbar										
64TTS34D4	1/2	3/8	M8	725	25	34	11.5	290.8	6.1	2.8
64TTS44D4	1/2	7/16	M8	570	32	44	11.5	290.8	6.1	2.8
64TTS55D4	1/2	7/16	M10	445	41	55	11.5	290.8	6.1	2.8
64TTS75D4	1/2	1/2	M12	340	55	75	11.5	290.8	6.1	2.8
64TTS90D4	1/2	1/2	M12	270	66	90	11.5	290.8	6.1	2.8
64TTS110D4	1/2	9/16	M12	225	81	110	11.5	290.8	6.1	2.8
64TTS125D4	1/2	9/16	M12	200	92	125	11.5	290.8	6.1	2.8
64TTS140D4	1/2	5/8	M14	180	103	140	11.5	290.8	6.1	2.8
64TTS150D6	3/4	5/8	M14	160	111	150	12.5	316.2	8.0	3.6
64TTS175D6	3/4	5/8	M14	135	129	175	12.5	316.2	8.0	3.6
64TTS205D6	3/4	5/8	M16	115	151	205	12.5	316.2	8.0	3.6
64TTS255D6	3/4	3/4	M16	95	188	255	12.5	316.2	8.0	3.6
64TTS345D6	3/4	3/4	M20	70	254	345	12.5	316.2	8.0	3.6
64TTS425D6	3/4	7/8	M20	55	313	425	12.5	316.2	8.0	3.6
64TTS570D6	3/4	1	M22	42	420	570	12.9	328.9	8.4	3.8
64TTS640D8	1	1 1/8	M22	32	472	640	15.9	404.1	14.3	6.5
64TTS750D8	1	1 1/8	M24	27	553	750	15.9	404.1	14.3	6.5
64TTS930D8	1	1 1/4	M27	22	686	930	15.9	404.1	14.3	6.5
64TTS1260D8	1	1 3/8	M27	16	929	1260	15.91	404.1	14.3	6.5
64TTS1475D8	1	1 1/2	M30	14	1088	1475	15.9	404.1	14.3	6.5
64TTS1820D8	1	1 3/4	M33	11	1342	1820	15.9	404.1	14.3	6.5
64TTS1985D8	1	1 3/4	M33	10	1464	1985	15.9	404.1	14.3	6.5
64TTS3850D12	1 1/2	1 3/4	M42	5	2837	3850	21.5	546.1	32.0	14.5

GENERAL:

Air Inlet: 3/8" NPT (45 button); 1/2" NPT (55 lever);
1/4" (64 series)
Minimum Hose Size: 3/8" (45 button);
1/2" (55, 64 series)
Tool performance rated at 90 psi (620kPa)
air pressure.

STANDARD EQUIPMENT:

Operating instructions & service manual
Aluminum Torque Reaction Bar
Steel Torque Reaction Bar (64 series tools rated above
50 ft. lbs.)
Slave Square Drive (64TTS3850D12)

OPTIONAL EQUIPMENT:

Steel Torque Reaction Bar:
45, 55 series: 869770
64.....D4 series: 48047128
Additional accessories: Page 57
* Weight without reaction bar.

Reaction Bar Nutrunners

Selectork

Cleco®

64 Series

Torque Range:
26 – 3850 Nm
19 – 2837 Ft. Lbs.

Bolt Size:
M8 – M42
3/8 – 1 3/4"

- Pistol Grip
- Reversible
- Swingbar
- Selectork adjustment



Model Number	Drive Size	Suitable for Bolt Size		Free Speed RPM	Torque Range		Length		Weight*	
		in.	mm		ft.-lbs.	Nm	in.	mm	lbs.	kg

Pistol – Selectork – Trigger Start – Reversible

64TTK34D4	1/2"	3/8	M8	725	19-25	26-34	11.5	290.8	6.3	2.9
64TTK44D4	1/2"	7/16	M8	570	24-32	33-44	11.5	290.8	6.3	2.9
64TTK55D4	1/2"	7/16	M10	445	30-41	41-55	11.5	290.8	6.3	2.9
64TTK75D4	1/2"	1/2	M12	340	41-55	56-75	11.5	290.8	6.3	2.9
64TTK90D4	1/2"	1/2	M12	270	50-66	68-90	11.5	290.8	6.3	2.9
64TTK110D4	1/2"	9/16	M12	225	61-81	83-110	11.5	290.8	6.3	2.9
64TTK125D4	1/2"	9/16	M12	200	69-92	94-125	11.5	290.8	6.3	2.9
64TTK140D4	1/2"	5/8	M14	180	77-103	105-140	11.5	290.8	6.3	2.9
64TTK150D6	3/4"	5/8	M14	160	83-111	113-150	12.5	316.2	8.2	3.7
64TTK175D6	3/4"	5/8	M14	135	97-129	131-175	12.5	316.2	8.2	3.7
64TTK205D6	3/4"	5/8	M16	115	113-151	154-205	12.5	316.2	8.2	3.7
64TTK255D6	3/4"	3/4	M16	95	141-188	191-255	12.5	316.2	8.2	3.7
64TTK345D6	3/4"	3/4	M20	70	191-254	259-345	12.5	316.2	8.2	3.7
64TTK425D6	3/4"	7/8	M20	55	235-313	319-425	12.5	316.2	8.2	3.7
64TTK570D6	3/4"	1	M22	42	315-420	428-570	13.0	328.9	8.6	3.9
64TTK640D8	1"	1 1/8	M22	32	354-472	480-640	15.9	404.1	14.5	6.6
64TTK750D8	1"	1 1/8	M24	27	415-553	563-750	15.9	404.1	14.5	6.6
64TTK930D8	1"	1 1/4	M27	22	514-686	698-930	15.9	404.1	14.5	6.6
64TTK1260D8	1"	1 3/8	M27	16	697-929	945-1260	15.9	404.1	14.5	6.6
64TTK1475D8	1"	1 1/2	M30	14	816-1088	1106-1475	15.9	404.1	14.5	6.6
64TTK1820D8	1"	1 3/4	M33	11	1007-1342	1365-1820	15.9	404.1	14.5	6.6
64TTK1985D8	1"	1 3/4	M33	10	1098-1464	1489-1985	15.9	404.1	14.5	6.6
64TTK3850D12	1 1/2"	1 3/4	M42	5	2128-2837	2888-3850	21.5	546.1	32.2	14.6

GENERAL:

Air Inlet: 3/8" NPT
Minimum Hose Size: 1/2"
Tool performance rated at 90 psi (620kPa)
air pressure.

STANDARD EQUIPMENT:

Operating instructions & service manual
Aluminum Torque Reaction Bar
(tools rated below 50 ft. lbs.)
Steel Torque Reaction Bar (tools rated above 50 ft. lbs.)
Slave Square Drive (64TTK3850D12)

OPTIONAL EQUIPMENT:

Steel Torque Reaction Bar: 64.....D4 series: 48047128
Additional accessories: Page 57
* Weight without reaction bar.