

Hold & Drive Nutrunners


Clecomatic Clutch & Stall


Cleco®

34 Series

Torque Range

24 - 103 Nm 17 - 76 Ft. Lbs.

- External torque adjustment (Clecomatic models)
- Indexable anglehead
- One torque spring to meet specified range
- Oilless blades 
- Reversible

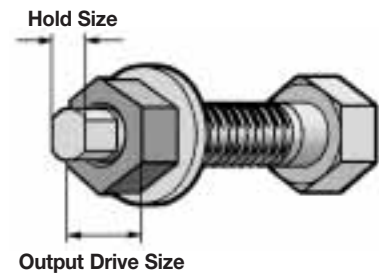

NOTE: Models listed are examples. Use chart on bottom of facing page for specific model required but not listed.

Model Number	Output Drive Size	Hold Size	Free Speed RPM	Torque		Length		Weight		Anglehead			
				ft.-lbs.	Nm	in.	mm	lbs.	kg	Height		Side to Center	
										in.	mm	in.	mm
Clecomatic - Lever Start - Reversible													
34RAA53H3MGFM5	13mm	5mm Female Hex	335	17-39	24-53	20.7	526	8.0	3.5	2.4	61	1.06	27
34RAA67H3MIFMA	15mm	7mm Female Hex	265	24-49	33-67	20.7	526	8.0	3.5	2.4	61	1.06	27
34RAA94H3MLFMB	18mm	8mm Female Hex	185	35-69	47-94	20.7	526	8.0	3.5	2.4	61	1.06	27
Stall - Lever Start - Reversible													
34RAS58H3MGFM5	13mm	5mm Female Hex	335	43	58	20.7	526	7.7	3.5	2.4	61	1.06	27
34RAS73H3MJT30	16mm	T30 Torx	265	54	73	20.7	526	7.7	3.5	2.4	61	1.06	27
34RAS103H3MOFMD	21mm	10mm Female Hex	185	76	103	20.7	526	7.7	3.5	2.4	61	1.06	27

GENERAL:

Air Inlet: 3/8" NPT
 Minimum Hose Size: 5/16"
 Tool performance rated at 90 psi (620kPa) air pressure.

STANDARD EQUIPMENT:

Operating instructions & service manual
 Suspension bail
 Exhaust Overhose
 Clutch adjustment tool (Clecomatic tools)
 Mounting Plate

OPTIONAL EQUIPMENT:

Assembly wrench: 201898
 Torque signal kit: 201900
 Non-reversible kit: 204999
 Additional accessories: Page 57