


# Percussion Tools

## Cleco®

### SC Series Triple Scaler

- Piston Type

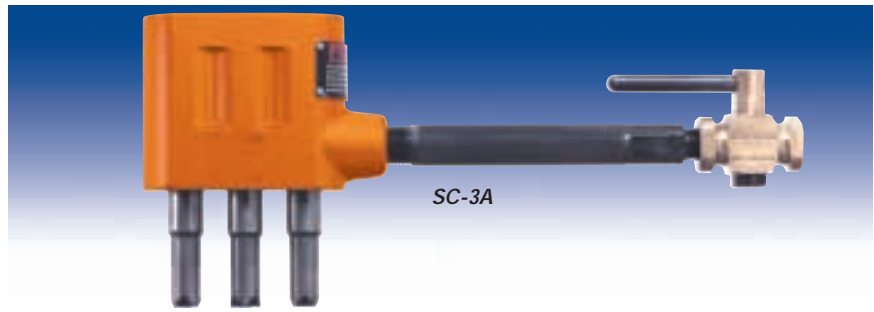

Model Number	Bore		Stroke		Blows Per Minute	Length		Weight			
	in.	mm	in.	mm		in.	mm	in.	mm		
SC3A Series Triple Scaler											
SC 3A	0.88	22	0.81	21	5200	13.3	338	7.9	3.6		

**GENERAL:**

Air Inlet: 3/8" NPT  
 Minimum Hose Size: 3/8"  
 Tool performance rated at 90 psi (620kPa) air pressure.

**STANDARD:**

Operating instructions & service manual

## Cleco®

### F Series Riveters

- For driving 1/8"-1/4" (3-6mm) rivets
- Standard beehive retainer
- Built-in air regulator controls power output
- Spool valve for precise speed control



Model Number	Bore		Stroke		Blows Per Minute	For Use With Rivet Set Shank Dia.		Length		Weight	
	in.	mm	in.	mm		in.	mm	in.	mm	lbs.	kg
Bee Hive Retainer											
F2-PT-RT-B	0.56	14	2.0	52	3900	.401	10.2	6.7	170	2.7	1.2
F4-PT-RT-B	0.56	14	4.0	102	1700	.401	10.2	8.7	222	3.3	1.5

**F Series Riveters – Round Taper Nose – Pistol Grip**

**GENERAL:**

Air Inlet: 1/4" NPTF;  
 Minimum Hose Size: 1/4"  
 Tool performance rated at 90 psi (620kPa) air pressure.

**STANDARD EQUIPMENT:**

Operating instructions & service manual  
 Refer to Page 7 for description of Rapid Select.

## Cleco®

### CH-30, CH4 Series Chipping Hammers

- Heavy duty for rugged use
- Ring valve hard hitting hammer
- Forged steel hammer
- Heat treated cylinder & piston for reduced wear
- Replaceable bushing



Model Number		Retainer Type	Bore		Stroke		Blows Per Minute	Length*		Weight*	
Round Nose	Hex Nose		in.	mm	in.	mm		in.	mm	lbs.	kg
<b>CH-30 Series Chipping Hammers – Pistol Grip Handle</b>											
CH-30-RD	CH-30-HX	Standard	1 1/8	28.5	2 1/2	64	2200	17.7	450	15.0	6.8
CH-30-RD-QC	CH-30-HX-QC	Quick Change	1 1/8	28.5	2 1/2	64	2200	17.7	450	15.0	6.8
<b>CH4 Series Chipping Hammers – 4 Bolt Spade Handle</b>											
CH4-30-RD		Standard	1 1/8	28.5	2 1/2	64	2000	15.7	398	18.4	8.4
CH4-30-RD-QC		Quick Change	1 1/8	28.5	2 1/2	64	2000	15.7	398	18.4	8.4

\*Less chisel

**GENERAL:**

Air Inlet: 3/8" NPT. Minimum Hose Size: 1/2" (12.7mm)  
 Air Consumption CH-30: 31.5 cfm; CH4: 28.2 cfm  
 Tool performance rated at 90 psi (620kPa) air pressure.

**STANDARD EQUIPMENT:**

Operating instructions & service manual  
 Refer to Page 7 for description of Rapid Select.



B1-CNB-LT-RD

## Cleco®

### B1, BR Series Needle Scalers

- Built-in Chisel Retainer
- Front Exhaust
- Lever Start
- Needle Type



B1-CNB-LT-RD-K

Model Number	Type	Bore		Stroke		Blows Per Minute	Length*		Weight*	
		in.	mm	in.	mm		in.	mm	lbs.	kg

#### B1 Series Needle Scalers – Lever Start

B1-CNB-LT-RD	Needle	1.0	25	1.1	28	4600	15.0	381	6.3	2.9
--------------	--------	-----	----	-----	----	------	------	-----	-----	-----

#### B1 Series Needle Scalers – Lever Start Kit\*\*

B1-CNB-LT-RD-K	Needle	1.0	25	1.1	28	4600	15.0	381	6.3	2.9
----------------	--------	-----	----	-----	----	------	------	-----	-----	-----

\* Length and weight include needles. \*\*Specs are for tool only

#### GENERAL:

Air Inlet: 1/4" NPTF

Minimum Hose Size: 5/16"

Tool performance rated at 90 psi (620kPa) air pressure.

Note: Kit includes tool, whip hose, extra set of needles, two chisels, extra chisel retainer, retainer parts and metal case.

#### STANDARD EQUIPMENT:

Operating instructions & service manual

#### OPTIONAL EQUIPMENT:

Additional Accessories: Page 62

Refer to page 7 for description of Rapid Select.



B1-C-PT

BR-C-LT

## Cleco®

### B1, BR Series Chisel Scalers

- Built-in Chisel Retainer
- Lever & Push-Pull Start Models
- Chisel Type

Model Number	Type	Bore		Stroke		Blows Per Minute	Length*		Weight*	
		in.	mm	in.	mm		in.	mm	lbs.	kg

#### B1 Series Chisel Scaler – Push-Pull Start

B1-C-PT	Chisel	1.0	25	1.1	28	4600	12.0	305	4.3	2.0
---------	--------	-----	----	-----	----	------	------	-----	-----	-----

#### B1 & BR Series Chisel Scalers – Lever Start

B1-C-LT	Chisel	1.0	25	1.1	28	4600	10.3	262	4.3	2.0
---------	--------	-----	----	-----	----	------	------	-----	-----	-----

BR-C-LT	Chisel	1.0	25	1.1	28	4200	10.4	264	4.3	2.0
---------	--------	-----	----	-----	----	------	------	-----	-----	-----

\*Length and weight does not include chisel

#### GENERAL:

Air Inlet: 1/4" NPTF

Minimum Hose Size: 5/16"

Tool performance rated at 90 psi (620kPa) air pressure.

#### STANDARD EQUIPMENT:

Operating instructions & service manual

#### OPTIONAL EQUIPMENT:

Additional Accessories: Page 62

Refer to page 7 for description of Rapid Select.