

DOTCO®

Nibblers

Model Number	Capacity – Gauge	Speed	Weight	Length
Rear Exhaust	Mild Steel SS	spm	lbs. kgs	in. mm
12-20F Series – 0.6hp (0.45 kW)				
12L2062-96	18 -	6	1.1 0.5	8.3 211

REPLACEMENT PARTS AND ACCESSORIES

Extra Cost: 14-1752: Punch
14-1751: Die

EXTRA EQUIPMENT:

For lock-off safety lever, substitute "S" for "L" in model number.
Overhose: See page 63



DOTCO®

Lint Pickers

■ Front or Rear Exhaust

Model Number		Free Speed	Weight*		Length		Collet
Front Exhaust	Rear Exhaust	rpm	ozs.	gr	in.	mm	Size
12-10 Series – 0.3 hp (0.22 kW) – 300 Series Collet							
12L1010-36		20,000	12	269	4.8	122	1/4"
	12L1031-36•	20,000	13	340	5.5	140	1/4"

GENERAL:

Air Inlet: Front Exhaust: 1/4" NPT
Rear Exhaust: 1/8" NPT –
Use 1/4" (6.4mm) I.D. Hose
All tools performance rated @ 90psi (620 kPa) air pressure

STANDARD EQUIPMENT:


Applicable collet, collet wrenches,
6" (152mm) Picker Rod 14-2181,

oilless blades(•)

EXTRA EQUIPMENT:

For lock-off safety lever, substitute "S" for "L" in model number.
Collets: See page 26
Overhose (rear exhaust): See page 63
9" (229mm) Picker Rod 14-2182


Refer to Page 7 for description of Rapid Select.

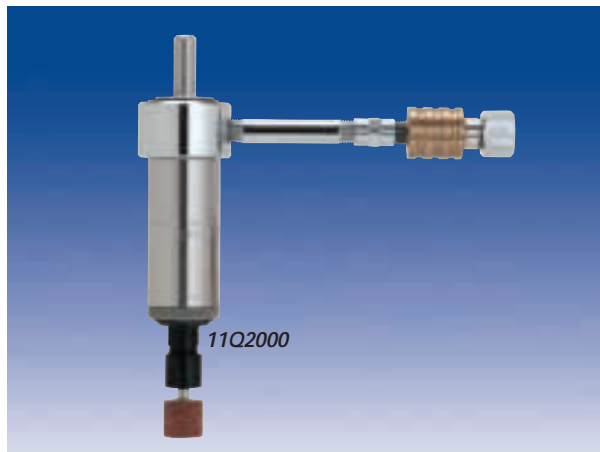

DOTCO®

Hole Grinders

- High-speed drilling/grinding hardened alloys
- Fine cutting of thin walls sections
- Materials too fragile for conventional methods
- Use on lathes, grinders, mills or drill presses for straightline machining
- Insert in a boring head for offset jig grinding
- Mount permanently for special applications

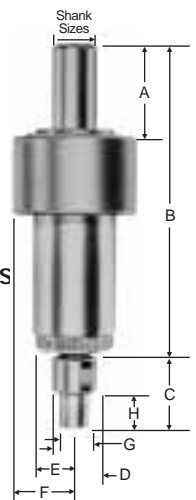

Model Number	Shank Dia.	Collet Chuck	Speed rpm	Weight		Approximate Dimensions (inches)							
				lbs.	kgs	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"
11-20 Series – 0.6 hp (0.45 kW)													
11Q2000	1/2"	200	25,000	3	1.4	1.3	6.3	1.3	0.8	0.8	1.0	0.8	-

GENERAL:

Air Inlet: 1/4" NPT – Use 5/16" (7.9mm) I.D. Hose
Air Consumption: 11-10 Series – 12 cfm (0.34 m³/min)
11-20 Series – 20 cfm (0.57 m³/min)
All tools performance rated @ 90psi (620 kPa) air pressure

STANDARD EQUIPMENT:

11-10 series: 1/4" (308) collet, collet wrenches, push-pull valve, coupling, and nipple
11-20 series: 1/4" (208) collet, collet wrenches, push-pull valve, coupling, and nipple