

Die Grinders

20,000 to 25,000 RPM


MP4424 & MP4430 Die Grinders

- Ideal for general purpose applications such as porting, light weld grinding, polishing, and breaking up sharp edges.
- Ergonomic grip for operator comfort
- Built-in power regulator
- 360° air inlet swivel
- Rear exhaust directs air away from work
- 1/4" capacity collet



MP4458

- Rugged all steel housing is ideal for rapid metal removal
- Trim ergonomic design enables excellent control
- Front exhaust
- 1/4" capacity collet – 200 Series

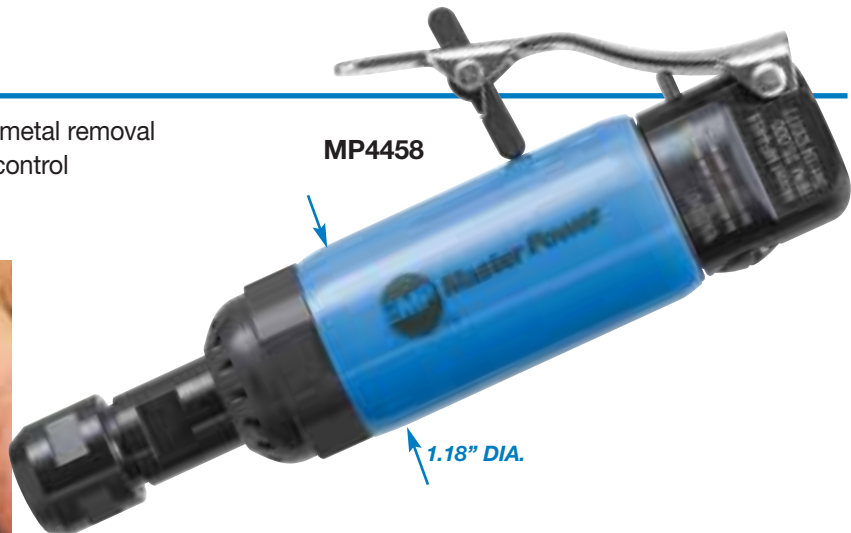

Model Number	Hp	Max Free RPM	Mounted Wheels	Carbide Bur	Length		Weight		Hose (I.D.)		CFM	Air Inlet (NPT)	Collet Size
					in.	mm	lbs.	kg	in.	mm			
MP4424	.3	20,000	1"	1/2"	6 3/8	160	1.25	.55	3/8	10	18	1/4"	1/4"
MP4430	.3	23,000	1"	1/2"	6	153	.875	.41	3/8	10	17	1/4"	1/4"
MP4458	.5	25,000	1 1/2"	1"	6 1/16	154	1.3	.60	3/8	10	25	1/4"	1/4"

GENERAL: Air Inlet 1/4" NPT. Use 1/4" (6.4 mm) I.D. hose. All tools performance rated @ 90psi (620 kPa) air pressure.

OPTIONAL: MP4424 & MP4430: 70619500 3/16" collet; 70610500 1/4" collet; 70610600 6 mm collet; MP4424: 543944 – 16oz. angle head grease.

