


Airetool®

FTC Series Firetube Tube Cutters

FTC Series Firetube Tube Cutters for 2", 2-1/2", and 3" O.D. tubes are air cylinder operated to increase productivity. A 2" x 13 gauge tube can be cut in less than ten seconds. The FTC series of Firetube Cutters are designed to operate on 90 PSI clean lubricated air.

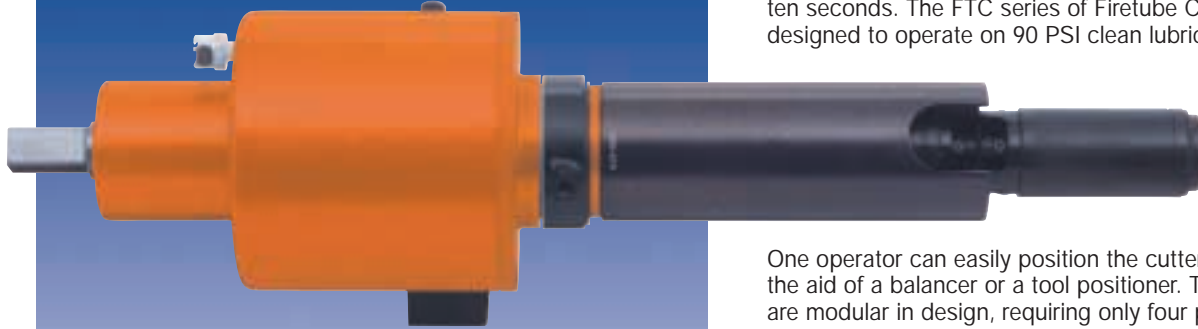

One operator can easily position the cutter in the tube with the aid of a balancer or a tool positioner. The FTC cutters are modular in design, requiring only four parts to change when adapting to different tube ODs, reducing inventory cost. The FTC series tube cutter also incorporates a quick change cutter wheel feature for fast easy replacement.

The FTC Firetube Tube Cutters are excellent tools for cutting tubes to length prior to beading.

Tube Size	Description	Part Number	Gauge	Front Pilots		Rear Pilots		Carriage		Collar	
2" size sensitive parts											
2"	FTC-200*	5524338	11	FTC 29 200 11	2998561	FTC 30 200 11	2998562	FTC 6 200	2998536	FTC 9 200	2998539
2"	FTC-200*	5524338	12	FTC 27 200 12	2998559	FTC 28 200 12	2998560	FTC 6 200	2998536	FTC 9 200	2998539
2"	FTC-200*	5524338	13	FTC 2 200 13	2998532	FTC 8 200 13	2998538	FTC 6 200	2998536	FTC 9 200	2998539
2-1/2" size sensitive parts											
2-1/2"	FTC-250*	5524339	10	FTC 35 250 10	2998567	FTC 36 250 10	2998568	FTC 43 250	2998575	FTC 45 250	2998577
2-1/2"	FTC-250*	5524339	11	FTC 33 250 11	2998565	FTC 34 250 11	2998566	FTC 43 250	2998575	FTC 45 250	2998577
2-1/2"	FTC-250*	5524339	12	FTC 31 250 12	2998563	FTC 32 250 12	2998564	FTC 43 250	2998575	FTC 45 250	2998577
3" size sensitive parts											
3"	FTC-300*	5524340	10	FTC 41 300 10	2998573	FTC 42 300 10	2998574	FTC 44 300	2998576	FTC 46 300	2998578
3"	FTC-300*	5524340	11	FTC 39 300 11	2998571	FTC 40 300 11	2998572	FTC 44 300	2998576	FTC 46 300	2998578
3"	FTC-300*	5524340	12	FTC 38 300 12	2998569	FTC 39 300 12	2998570	FTC 44 300	2998576	FTC 46 300	2998578

Some items are available on a quotation basis only.

SPECIFICATIONS

Length: 22" (558.8mm)
 Weight: 15 3/4 lbs. (7.15 kg)
 Maximum PRM: 250
 Drive: 3/4" (19.04 mm) square
 Adjustable Cut Off Length: 3/16" - 3/4" (4.77 - 19 mm)
 Maximum Cut Off Length: 6" (152.4 mm)
 Maximum Working Pressure: 90 PSI (6.5 Bar)
 Minimum Cut Off: 1"

* Tool comes complete with pilots for all three gauges.

RECOMMENDED SPARE PARTS

FTC 4 Cutter Wheel: 2998534
 FTC 5 Cutter Wheel Pin: 2998535
 FTC 7 Feed Wedge: 2998537
 FTC 10 Feed Rod: 2998540

ACCESSORIES

Valve Kits: A valve kit consists of a cylinder activation switch, anti-rotation rod and pneumatic plumbing hardware for adapting to the Airetool.
 1752 Valve Kit: 5524341
 1550 Valve Kit: 5524343
 1550 ATR Valve Kit: 524344